


# SUPERPRO Your Complete Wood Stove Venting Solution!

## Step 2

Determine the number of Chimney Lengths required. Chimney Lengths are available in 48", 36", 24", 18", 12" and 6" lengths.

The chimney must extend at least 3' above the highest point where it passes through the roof surface and at least 2' higher than any part of the building within a horizontal distance of 10'.

NOTE: When calculating the installed length of your chimney subtract 11/8" for each joint & include the Height Requirements as shown in this illustration.

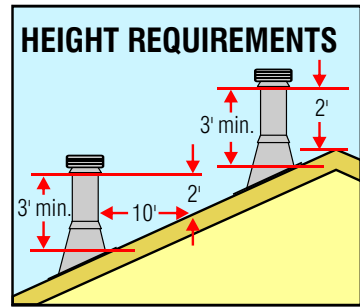

## Helpful Installation Tips

Need Help? ... Contact us at: 1.800.992.VENT (8368) or, visit us online @ [www.superpro.com](http://www.superpro.com)

## Step 3

Choose the proper Roof Flashing required for your installation.

To determine which Roof Flashing you require, work out the pitch of your roof.

6" Chimney Diameter:

0/12 - 6/12 Roof Pitch = JSC6AAF - (Low Slope)  
6/12 - 12/12 Roof Pitch = JSC6AF2 - (Steep Slope)

8" Chimney Diameter


0/12 - 6/12 Roof Pitch = JSC8AAF - (Low Slope)  
6/12 - 12/12 Roof Pitch = JSC8AF2 - (Steep Slope)

NOTE: for Metal Roofs use:

Universal Rubber Boot Flashing Kit = 200275


## ROOF FLASHING SELECTION CHART

To calculate your roof pitch use one of the 12 inch rulers to measure the number of inches (A) from the end of the other ruler down to the roof.

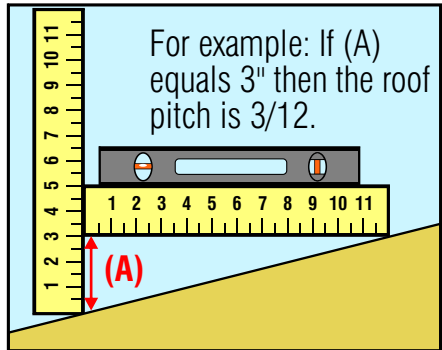

## Step 4 Offset Calculation for Ceiling Support Installations Only

If an offset is required to avoid rafters or other obstructions, measure the horizontal distance required and the vertical height available, refer to the Chimney Offset Chart to determine the Elbows and Chimney Length required.

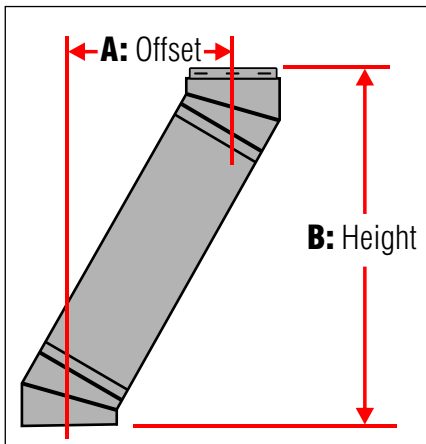


CHIMNEY OFFSET CHART					
		6" Diameter		8" Diameter	
Elbow	Chimney Lengths	A	B	A	B
2 x 15°	no chimney length	1-1/8"	10"	1-1/4"	10-3/8"
2 x 15°	6" chimney length	2-3/8"	14-1/4"	2-1/2"	15-5/8"
2 x 15°	12" chimney length	4"	20-1/2"	4"	21"
2 x 15°	24" chimney length	7"	32"	7"	32-1/2"
2 x 15°	36" chimney length	10-1/8"	43-5/8"	10-1/4"	44-1/8"
2 x 30°	no chimney length	2-3/4"	11-5/8"	3-1/2"	14-1/2"
2 x 30°	6" chimney length	5-1/4"	15-7/8"	6"	18-3/8"
2 x 30°	12" chimney length	8-1/4"	21"	9"	24"
2 x 30°	24" chimney length	14-1/4"	31-3/8"	15"	32-3/8"
2 x 30°	36" chimney length	20-1/4"	41-7/8"	21"	44-3/4"

Note: All measurements in inches. Offset tolerances ± one inch

## Step 5

The final step required to complete your Wood Stove Venting solution is to determine the Model DSP Double Wall Stove Pipe parts that will be needed to complete your installation. (Refer to Installation Diagrams (Step 1) and complete your Installation Planning Work Sheet)

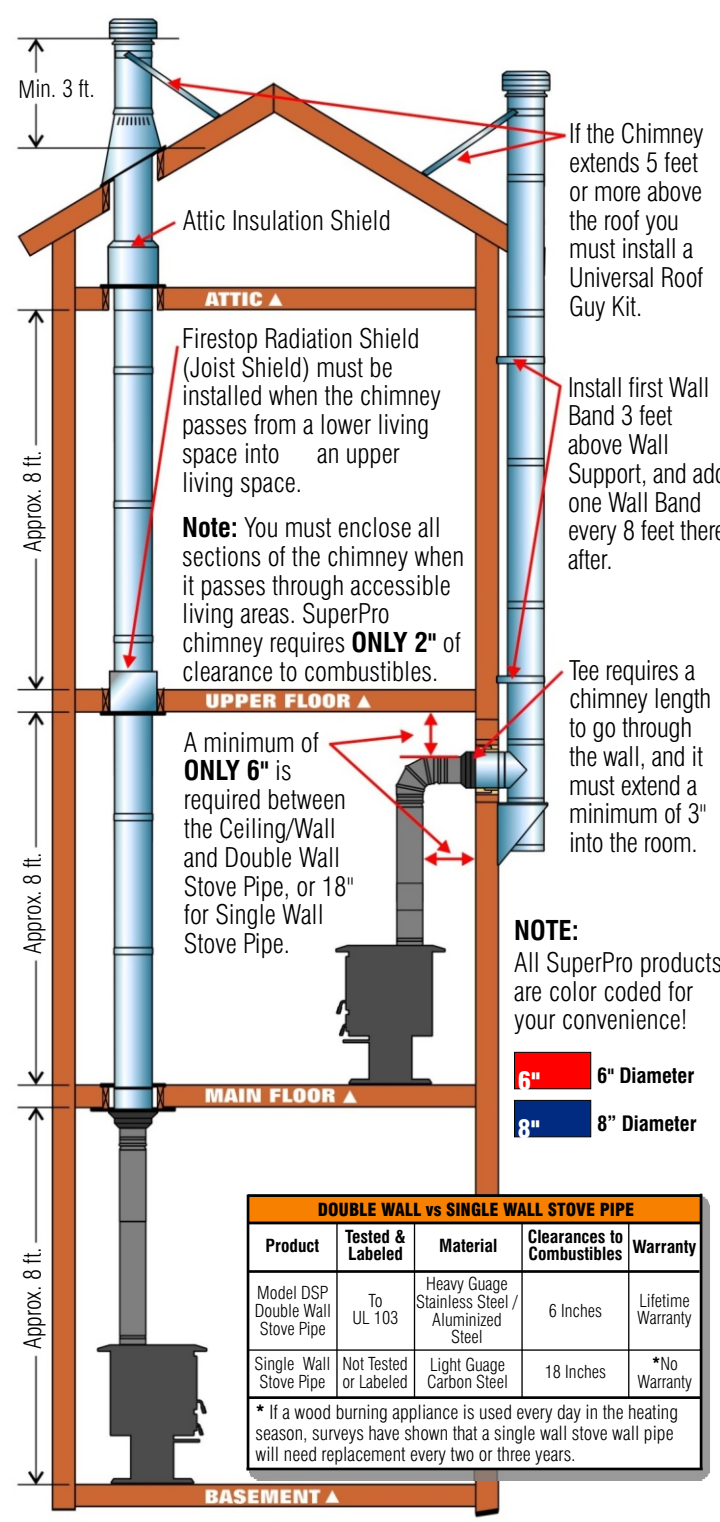

DOUBLE WALL vs SINGLE WALL STOVE PIPE				
Product	Tested & Labeled	Material	Clearances to Combustibles	Warranty
Model DSP Double Wall Stove Pipe	To UL 103	Heavy Gauge Stainless Steel / Aluminized Steel	6 Inches	Lifetime Warranty
Single Wall Stove Pipe	Not Tested or Labeled	Light Gauge Carbon Steel	18 Inches	*No Warranty

\* If a wood burning appliance is used every day in the heating season, surveys have shown that a single wall stove wall pipe will need replacement every two or three years.



# SUPERPRO

For the Chimney Professional Who Demands the Best!

## INSTALLATION PLANNING GUIDE



## Getting Started

Before you begin, determine the (inner) diameter of your Chimney.

This is usually the same size (6", or 8") as the flue collar on your wood stove.



Reduce, Reuse, Recycle  
Our literature is printed on recyclable paper

SPR 004-E USA R&B # 3804 - 01-09




SUPERPRO For the Chimney Professional Who Demands the Best!




Step 1 Select type of installation by determining where your chimney will run. (Installations may vary, please refer to the installation instructions @ www.superpro.com)

Decorator Ceiling Support Installation

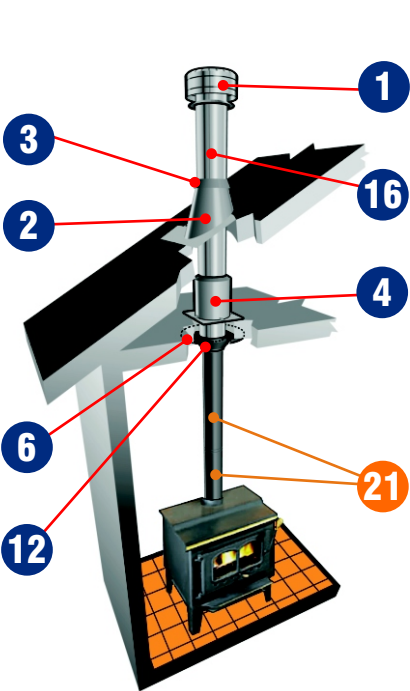


Note: If your Chimney runs more than 50' you must install a Roof Support # JSC\*RS.

Decorator Ceiling Support Installation Two Story

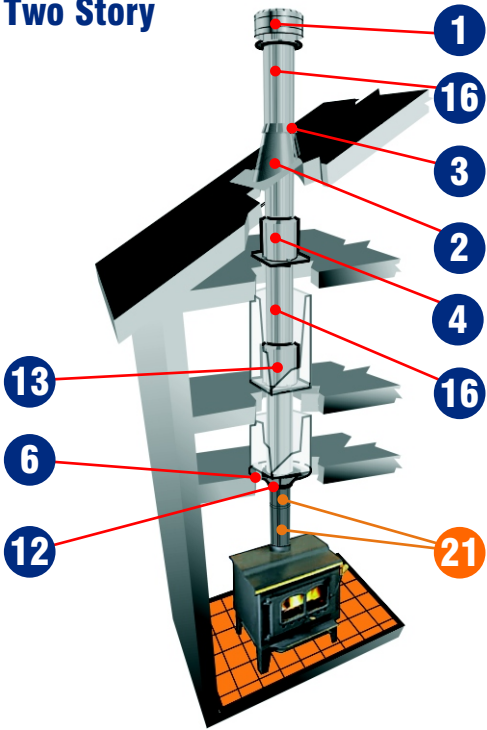


Note: If your Chimney runs more than 50' you must install a Roof Support # JSC\*RS

Decorator Ceiling Support Installation with Offset

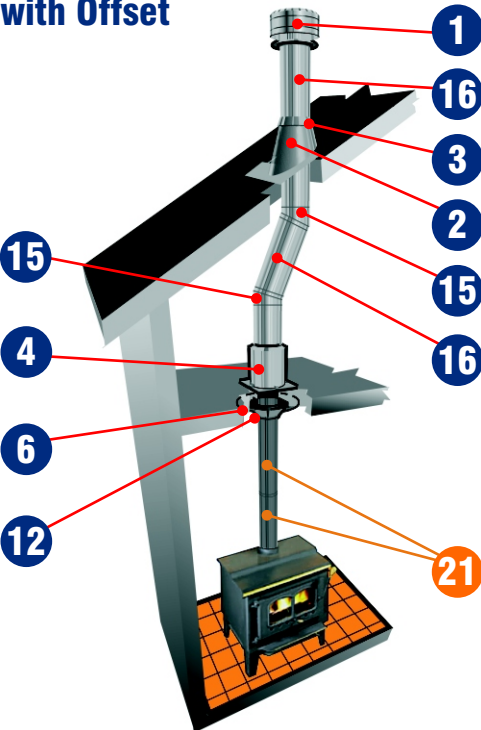


Note: If your Chimney runs more than 50' you must install a Roof Support # JSC\*RS

Cathedral Ceiling Support Installation

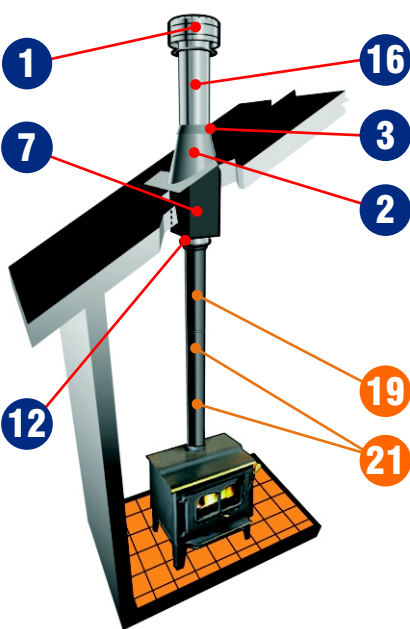

Note: If your Chimney runs more than 38' you must install a Roof Support. # JSC\*RS


Wall Support Installation

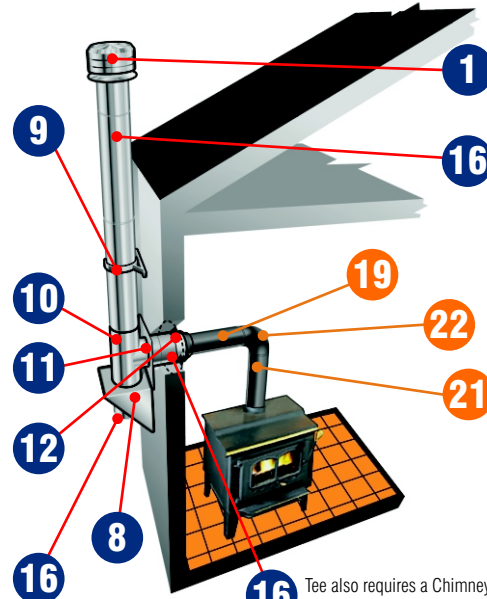

Tee requires a 12" Chimney Length to be installed below the Tee.

Note: If your Chimney runs more than 38' you must install an Adjustable Intermediate Wall Support. # JSC\*AIWS

Wall Support Installation Through a Soffit

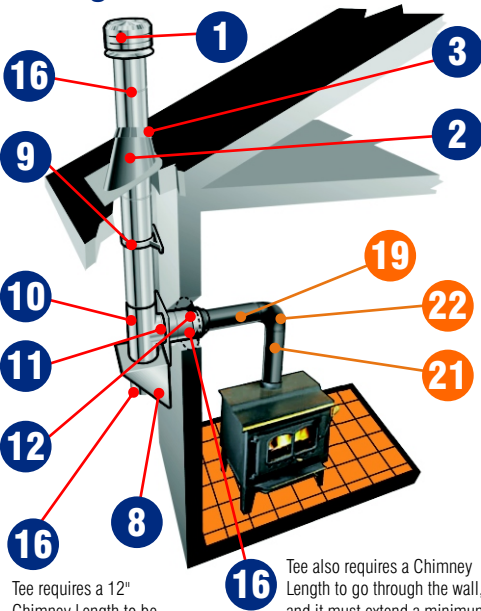

Tee requires a 12" Chimney Length to be installed below the Tee.

Note: If your Chimney runs more than 38' you must install an Adjustable Intermediate Wall Support. # JSC\*AIWS or a Roof Support # JSC\*RS

Installation Planning Work Sheet Diameter Required: 6" 8" ALL PARTS ARE ALSO AVAILABLE IN 5" AND 7" DIAMETERS AS SPECIAL ORDER

	SUPERPRO	PART #	PRICE	QTY	TOTAL
1	Premium Rain Cap	SPR*PRC	\$	X	=
Not Illustrated	Spark Arrestor	JSC*SPAR	\$	X	=
2	Adjustable Roof Flashing (See Step 3)				
	Adj. 0/12 to 6/12	JSC*AAF	\$	X	=
	Adj. 6/12 to 12/12	JSC*AF2	\$	X	=
Not Illustrated	Universal Rubber Boot Flashing Kit (See Step 3)	200275	\$	X	=
3	Storm Collar	JSC*SC-1	\$	X	=
4	Attic Insulation Shield	JSC*AIS	\$	X	=
Not Illustrated	Rafter Radiation Shield	JSC*RRS	\$	X	=
6	Deluxe Black Ceiling Support with Brass Trim	SPR*CSB	\$	X	=
7	Cathedral Ceiling Support with Brass Trim	SPR*CCSB	\$	X	=
8	Adjustable Wall Support	JSC*AWS	\$	X	=
Not Illustrated	Adaptor Plate	JSC*AP	\$	X	=
9	Wall Bands (see Installation Tips)	JSC*WB	\$	X	=
10	Insulated Tee & Plug	SPR*ITP	\$	X	=
Not Illustrated	Tee Plug Insulated	J*1TPI	\$	X	=
11	Wall Thimble with Brass Trim	SPR*WTB	\$	X	=
12	Stove Pipe Adaptor	JSC*ASE	\$	X	=
Not Illustrated	Finishing Plate	JSC*FP	\$	X	=
Not Illustrated	Black Trim Collar	SPR*TCB	\$	X	=
13	Firestop Radiation Shield (Firestop Joist Shield) (2 story installation)	JSC*FRS	\$	X	=
Not Illustrated	Adjustable Universal Roof Guy Kit (see Installation Tips) (if Chimney extends more than 5' above Roof Line)	JURGK-1	\$	X	=
15	If Offset is Required add one (2 per Kit) (See Step 4)				
	15° Elbow Kit	SPR*EL15K	\$	X	=
	30° Elbow Kit	SPR*EL30K	\$	X	=
16	Chimney Lengths (See Step 2)				
	48" Length	SPR*L48	\$	X	=
	36" Length	SPR*L36	\$	X	=
	24" Length	SPR*L24	\$	X	=
	18" Length	SPR*L18	\$	X	=
	12" Length	SPR*L12	\$	X	=
	6" Length	SPR*L6	\$	X	=
Not Illustrated	Locking Band (recommended for each pipe length)	SPR*SLB	\$	X	=
Not Illustrated	Universal Shielding Insulation (use with parts 4, 7 or 11)	JUSI	\$	X	=

	DSP STOVE PIPE	PART #	PRICE	QTY	TOTAL
Not Illustrated	Universal Chimney Adapter	DSP*CA	\$	X	=
19	Adjustable Length (Installs from 12" to 18") Includes Finishing Band	DSP*AL-1	\$	X	=
20	Telescopic Length (Installs from 38" to 68") Includes Finishing Band	DSP*TL	\$	X	=
21	Fixed Pipe Lengths				
	Length				
	6"	DSP*P6-1	\$	X	=
	12"	DSP*P12-1	\$	X	=
	24"	DSP*P24-1	\$	X	=
	36"	DSP*P36-1	\$	X	=
Not Illustrated	45° Elbow	DSP*E4-1	\$	X	=
22	90° Elbow	DSP*E9-1	\$	X	=
Not Illustrated	Tee includes Cap	DSP*TE-1	\$	X	=
Not Illustrated	Damper Kit	DSP*DK-1	\$	X	=
Not Illustrated	Stove Adaptor	DSP*SA-1	\$	X	=
Not Illustrated	Flush Stove Adaptor	DSP*FSA-1	\$	X	=
Not Illustrated	Oval to Round Adaptor (Only Available in 8" Diameter)	DSP80TR	\$	X	=
Not Illustrated	IWT Insulated Wall Thimble	DSP*IWT	\$	X	=
Not Illustrated	Masonry Adaptor	DSP*MA	\$	X	=
Not Illustrated	Reducers				
	7" to 6"	DSPR76	\$	X	=
	8" to 7"	DSPR87	\$	X	=
	8" to 6"	DSPR86	\$	X	=
Not Illustrated	Increases				
	6" to 7"	DSPi67	\$	X	=
	7" to 8"	DSPi78	\$	X	=
Not Illustrated	Universal Finishing Band	DSP*FB	\$	X	=

MODEL DSP STOVE PIPE TOTAL \$

SUPERPRO CHIMNEY TOTAL \$